



REF.  
DATE

For each item select the request option



1

# TINY

# FOLIO®

| Product type | Quantity | 1 Screen type | 2 CCT | 3 Lens | 4 Dimmability | 5 Aluminum finish |
|--------------|----------|---------------|-------|--------|---------------|-------------------|
| TINY         |          |               |       |        |               |                   |

[mm] [in]

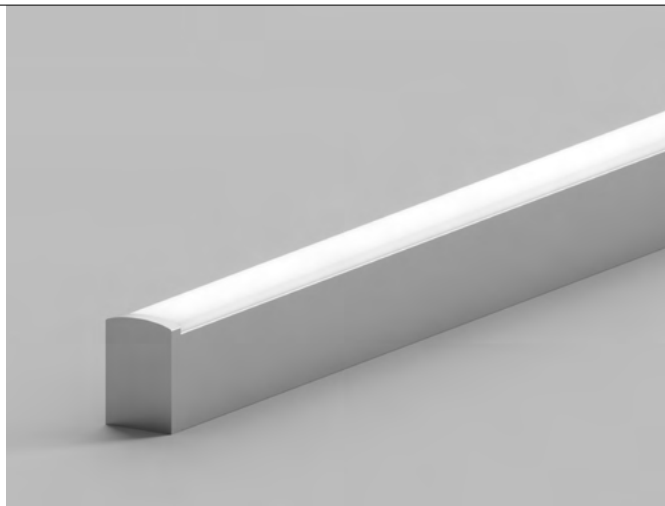

## LIGHT SOURCE

|                          |                                                                                                                                                                                                                                              |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LED type:                | Nichia                                                                                                                                                                                                                                       |
| LED Voltage:             | 24 Vdc                                                                                                                                                                                                                                       |
| LED Duration:            | 50 000 h.                                                                                                                                                                                                                                    |
| Power:                   | 20 W/m                                                                                                                                                                                                                                       |
| Screen type:             | <input type="checkbox"/> <input checked="" type="radio"/> Transparent<br><input type="checkbox"/> <input checked="" type="radio"/> Opal Double-Satin<br><input type="checkbox"/> <input checked="" type="radio"/> Opal                       |
| Delivered Lumen:         | <input checked="" type="radio"/> 1900 lm/m<br><input checked="" type="radio"/> 1700 lm/m<br><input checked="" type="radio"/> 940 lm/m                                                                                                        |
| Efficacy:                | <input checked="" type="radio"/> 95 lm/W<br><input checked="" type="radio"/> 85 lm/W<br><input checked="" type="radio"/> 47 lm/W                                                                                                             |
| Candela:                 | <input checked="" type="radio"/> 646 cd<br><input checked="" type="radio"/> 578 cd<br><input checked="" type="radio"/> 320 cd                                                                                                                |
| CRI:                     | > 90<br>( > 100 on request - Nichia Optisolis™ )                                                                                                                                                                                             |
| R9:                      | > 50<br>( > 80 on request - Nichia Optisolis™ )                                                                                                                                                                                              |
| TM30:                    | Rf: 91 Rg: 100                                                                                                                                                                                                                               |
| SDCM:                    | 3                                                                                                                                                                                                                                            |
| Color Temperature (CCT): | <input type="checkbox"/> 2700K<br><input type="checkbox"/> 3000K<br><input type="checkbox"/> 3500K<br><input type="checkbox"/> 4000K<br><input type="checkbox"/> 5700K<br><input type="checkbox"/> on request:<br>2000K, 2200K, 2500K, 6500K |

The Linear LED range redefines how light interacts with surfaces. Designed to meet the most demanding bespoke projects, these linear systems offer endless possibilities in terms of length, output, and placement. By sharing a common technical DNA with our point-source elements, they guarantee absolute visual harmony and a streamlined installation process, making them the ideal choice for comprehensive lighting layouts. Every detail is engineered to transform functional lighting into a distinctive architectural element.



## GENERAL SPECS.

|             |                                |
|-------------|--------------------------------|
| Dimensions: | 9.4 x 13.1 mm / 0.37 x 0.51 in |
| Length:     | max 3000 mm / 118 in (custom)  |
| IP:         | 40                             |

## OPTICS

|                  |      |
|------------------|------|
| Optic Type:      | lens |
| Beam Angle (BA°) | 120° |

## ELECTRICAL

|              |                                                                                                                                                                                                                                                |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Driver:      | AC/DC 24 V                                                                                                                                                                                                                                     |
| Dimmability: | <input type="checkbox"/> 0-10 V<br><input type="checkbox"/> 1-10 V<br><input type="checkbox"/> DALI<br><input type="checkbox"/> DMX<br><input type="checkbox"/> Bluetooth<br><input type="checkbox"/> PUSH<br><input type="checkbox"/> Casambi |

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

2

# TINY

FOLIO®

| Product type | Quantity | 1 Screen type | 2 CCT | 3 Lens | 4 Dimmability | 5 Aluminum finish |
|--------------|----------|---------------|-------|--------|---------------|-------------------|
| TINY         |          |               |       |        |               |                   |

## ALUMINIUM FINISHES

5


RAL/NCS/Pantone:

Polished finish:



## LENS INFO


Beam Angle (BA°): 120°

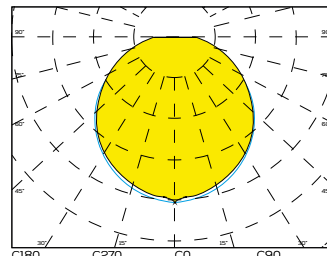

## INSTALLATION


### Mechanic fastening

1. Install the fixing profile by screws
2. Snap the TINY profile into the fixing profile



### Magnetic fastening

1. Fix the metal plate to the material
2. Attach the linear light




## POWER CABLE EXIT

Power cable: 1000 mm / 39 in


OPTION .A  
EXIT FROM THE END CAP



OPTION .B  
EXIT FROM THE SIDE




OPTION .C  
EXIT FROM BELOW




## POSITION GUIDELINES


OPTION .A



OPTION .B



OPTION .C



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.