

SLIM.13

FOLIO

Product	Quantity	1 Power	2 Screen type	3 CCT	4 Lens	5 Dimmability	6 Finish	7 Accessory	Acc. quantity	8 Acc. lens	9 Acc. finish
SLIM.13											

[mm] [in]



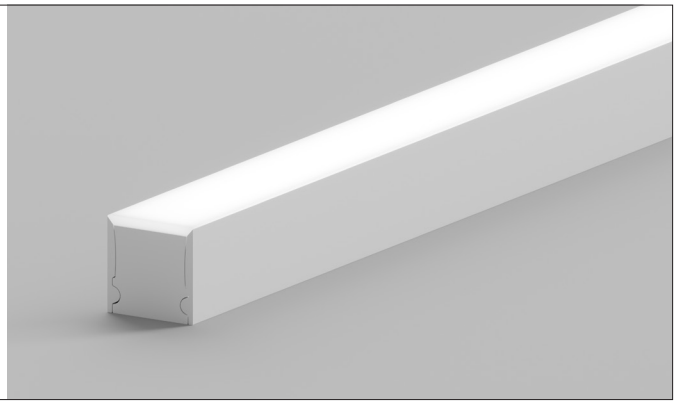

The Linear LED range redefines how light interacts with surfaces.
Designed to meet the most demanding bespoke projects, these linear systems offer endless possibilities in terms of length, output, and placement. By sharing a common technical DNA with our point-source elements, they guarantee absolute visual harmony and a streamlined installation process, making them the ideal choice for comprehensive lighting layouts. Every detail is engineered to transform functional lighting into a distinctive architectural element.

LIGHT SOURCE

LED Type:		Nichia
LED Duration:		50000 hours
Power: 1	☐	15,6 W/m / 3.05 W/ft std
	☐	22,6 W/m / 4.57 W/ft high
Screen Type: 2	☐	Opal 20 O20
	☐	Opal 35 O35
Delivered Lumen:	std O20	1680 lm/m / 512.06 lm/ft
	std O35	1408 lm/m / 429.16 lm/ft
	high O20	2397 lm/m / 731.61 lm/ft
(186 LED/m)	high O35	2037 lm/m / 621.88 lm/ft
Efficiency:	std O20	107.79 lm/W
	std O35	90.26 lm/W
	high O20	106.06 lm/W
	high O35	90.13 lm/W
CRI:		› 90
R9:		› 50
TM30:		Rf: 91 Rg: 100
SDCM:		3
Color Temperature (CCT): 3	☐	○ 2700K
	☐	○ 3000K
	☐	○ 3500K
	☐	○ 4000K
	☐	○ 5000K
	☐	on request: 2000K, 2200K, 2500K, 6500K

GENERAL SPECS.

Dimensions:	13 x 13 mm / 0.51 x 0.51 in
Lenght:	max 2000 mm / 78.7 in

OPTICS

Optic Type:		lens
Beam Angle (BA°) 4	☐	15°
	☐	20°x40°
	☐	25°
	☐	45°

ELECTRICAL

Voltage:		24 Vdc	
Class:		3	
Driver:		AC/DC 24V	
Dimmability: 5	☐	0-10 V	☐ PHASE
	☐	1-10 V	☐ PUSH
	☐	DALI	☐ Bluetooth
	☐	DMX	☐ Casambi
IP:		40	

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.

SLIM.13

FOLIO

Product	Quantity	1 Power	2 Screen type	3 CCT	4 Lens	5 Dimmability	6 Finish	7 Accessory	Acc. quantity	8 Acc. lens	9 Acc. finish
SLIM.13											

FINISH


6

Standard:


black ☐ white ☐

LENS INFO


Beam Angle (BA°): 15°




Beam Angle (BA°): 20°x40°



Beam Angle (BA°): 25°



Beam Angle (BA°): 45°




INSTALLATION

Magnetic

1. Secure the metal plate to the mounting surface


2. Magnetically attach the linear profile




POWER CABLE EXIT

Power cable: 1000 mm / 39 in


OPTION .A
EXIT FROM THE END CAP



OPTION .B
EXIT FROM THE SIDE




OPTION .C
EXIT FROM BELOW




POSITION GUIDELINES


OPTION .A



OPTION .B



OPTION .C




Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.


SLIM.13


FOLIO

Product	Quantity	1 Power	2 Screen type	3 CCT	4 Lens	5 Dimmability	6 Finish	7 Accessory	Acc. quantity	8 Acc. lens	9 Acc. finish
SLIM.13											

ACCESSORY
7

☐  Thin.15

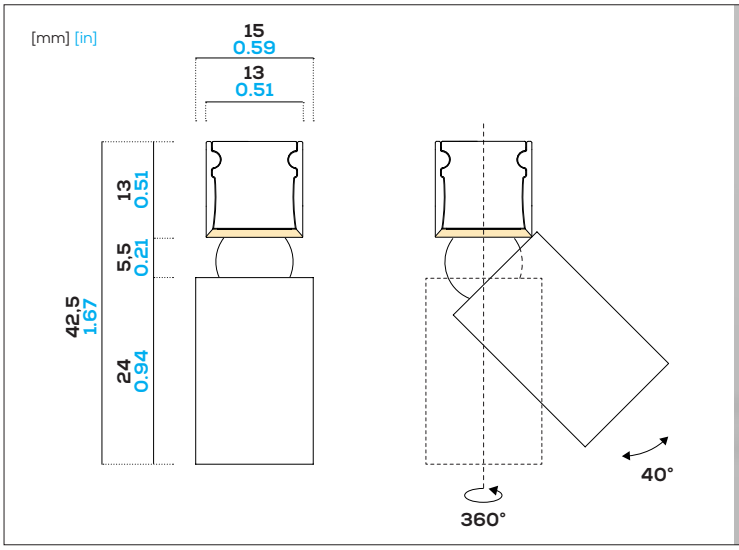

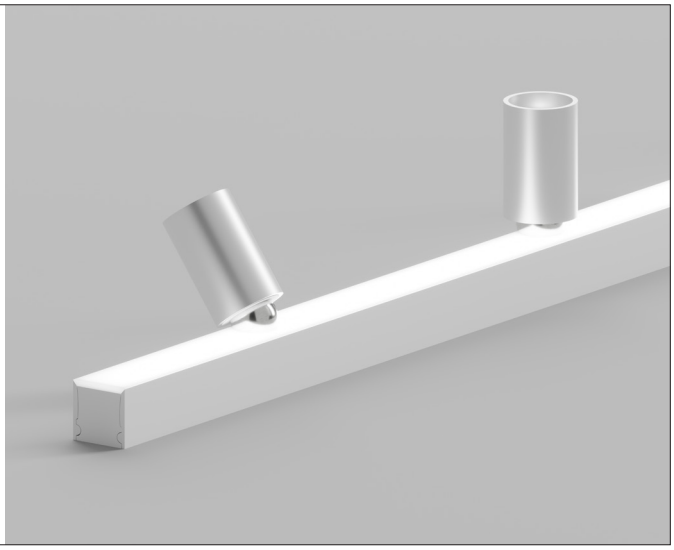

LIGHT SOURCE

LED Type:	Nichia
LED Duration:	50000 hours
Power:	1.5 W
Delivered Lumen:	145 lm
Efficiency:	96.6 lm/W
Candela:	49.3 cd
CRI:	› 90
R9:	› 80
TM30:	Rf: 91 Rg: 100
SDCM:	2
Color Temperature (CCT): *must match linear CCT*	○ 2700K ○ 3000K ○ 3500K ○ 4000K on request: 2000K, 2200K, 2500K, 5000K

GENERAL SPECS.

Weight:	0,01 kg
Movement:	Adjustable: 360° rotation, 0-40° tilt

OPTICS

Optic Type:	lens
Beam Angle (BA°) 8	☐ 15° ☐ 25° ☐ 35° ☐ custom on request

ELECTRICAL

Voltage:	24 Vdc	
Class:	3	
Driver:	AC/DC 24V	
Dimmability: *must match linear dimmability*	0-10 V 1-10 V DALI DMX	PHASE PUSH Bluetooth Casambi
IP:	20	

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.

SLIM.13

FOLIO

Product	Quantity	1 Power	2 Screen type	3 CCT	4 Lens	5 Dimmability	6 Finish	7 Accessory	Acc. quantity	8 Acc. lens	9 Acc. finish
SLIM.13											

ACCESSORY



Thin.15

ALUMINUM FINISHES

Standard:

black ☐ white ☐

Special
RAL/NCS/Pantone: ☐

Special
Metallic effect:

aluminium ☐ copper ☐
steel ☐ champagne ☐
brass ☐ bronze ☐

Special
Metallic delabrè effect:


aluminium ☐ copper ☐
steel ☐ champagne ☐
brass ☐ bronze ☐

Special
Polished:


brass ☐ copper ☐
chrome ☐ black nickel ☐

LENS INFO


Beam Angle (BA°): 15°



Beam Angle (BA°): 25°




Beam Angle (BA°): 35°




POSITION GUIDELINES

OPTION .A



OPTION .B



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.

SLIM.13

FOLIO

Product	Quantity	1 Power	2 Screen type	3 CCT	4 Lens	5 Dimmability	6 Finish	7 Accessory	Acc. quantity	8 Acc. lens	9 Acc. finish
SLIM.13											

***DRAW HERE YOUR OWN SETUP**
PLEASE INDICATE ALL DIMENSIONS

For complex configurations, a technical drawing is required

[mm] [in]

70
2.75
MINIMUM DISTANCE BETWEEN SPOTS

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.