

STOCKY FLAT 25

FOLIO

Product type	Quantity	1 LED type	2 Power	3 Screen type	4 CCT	5 Dimmability	6 Aluminum finish	7 Accessory
STOCKY FLAT 25								

[mm] [in]



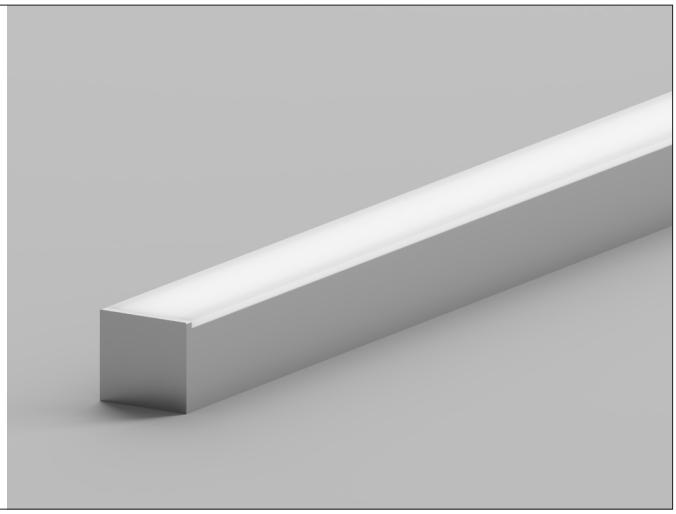

LIGHT SOURCE

LED Type: 1
- ☐ Nichia
- ☐ Nichia Optisolis™

LED Duration: 50000 hours

Power: 2
- ☐ 12 W/m / 3.66 W/ft std
- ☐ 18 W/m / 5.49 W/ft high

Screen Type: 3
- ☐ Transparent T
- ☐ Opal O

Delivered Lumen: *(186 LED/m)*
- std T — 2100 lm/m / 640.08 lm/ft
- std O — 1344 lm/m / 409.65 lm/ft
- high T — 2990 lm/m / 911.35 lm/ft
- high O — 2016 lm/m / 614.48 lm/ft

Efficiency: 175 lm/W / 112 lm/W

CRI: › 90 (› 100 Nichia Optisolis™)

R9: › 50 (› 80 Nichia Optisolis™)

TM30: Rf: 91 Rg: 100

SDCM: 3

Color Temperature (CCT): 4
- ☐ 2700K
- ☐ 3000K
- ☐ 3500K
- ☐ 4000K
- ☐ 5700K
- ☐ Tunable White (2700K-5700)
- ☐ RGBW
- ☐ on request: 2000K, 2200K, 2500K, 6500K

The Linear LED range redefines how light interacts with surfaces. Designed to meet the most demanding bespoke projects, these linear systems offer endless possibilities in terms of length, output, and placement. By sharing a common technical DNA with our point-source elements, they guarantee absolute visual harmony and a streamlined installation process, making them the ideal choice for comprehensive lighting layouts. Every detail is engineered to transform functional lighting into a distinctive architectural element.

GENERAL SPECS.

Dimensions: 21 x 19,2 mm / 0.82 x 0.75 in

Lenght: max 3000 mm / 118.11 in

OPTICS

Optic Type: lens

Beam Angle (BA°): 120° (∠ 25°)

ELECTRICAL

Voltage: 24 Vdc

Class: 3

Driver: AC/DC 24V

Dimmability: 5
- ☐ 0-10 V
- ☐ 1-10 V
- ☐ DALI
- ☐ DMX
- ☐ PHASE
- ☐ PUSH
- ☐ Bluetooth
- ☐ Casambi

IP: 40

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.

STOCKY FLAT 25

FOLIO


Product type	Quantity	1 LED type	2 Power	3 Screen type	4 CCT	5 Dimmability	6 Aluminum finish	7 Accessory
STOCKY FLAT 25								

ALUMINUM FINISHES
5

Standard:

Special
RAL/NCS/Pantone:

Special
Metallic effect:

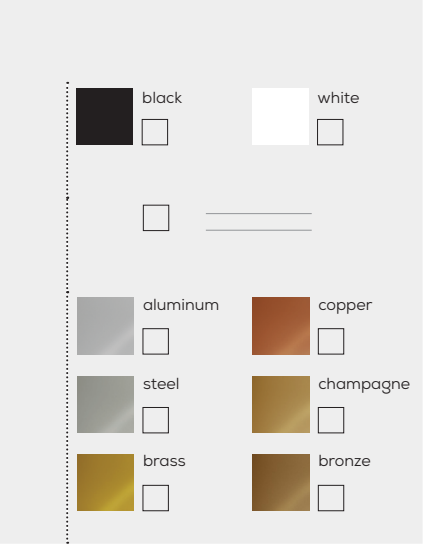

LENS INFO


Beam Angle (BA°): 120° (∠25°)

INSTALLATION

Mechanical

1. Install the fixing profile with screws


2. Snap the linear profile into place



Magnetic

1. Secure the metal plate to the mounting surface

2. Magnetically attach the linear profile




Recessed in drywall

1. Install the perforated metal flange

2. Plaster and skim for a trimless finish

3. Magnetically attach the linear profile

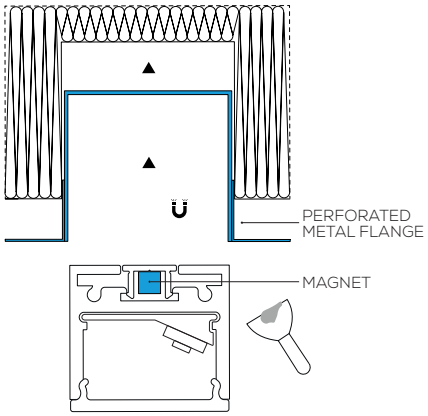


Recessed in hard surface


1. Install the drywall profile

2. Secure it in place

3. Magnetically attach the linear profile

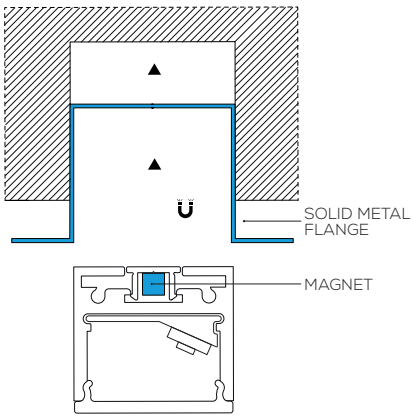


ACCESSORY
6

☐ 

Perforated metal flange

Application: Trimless recessed installation in drywall

☐ 

Solid metal flange

Application: Standard recessed installation in hard surfaces

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.

STOCKY FLAT 25


FOLIO

Product type	Quantity	1 LED type	2 Power	3 Screen type	4 CCT	5 Dimmability	6 Aluminum finish	7 Accessory
STOCKY FLAT 25								


POWER CABLE EXIT

Power cable: 1000 mm / 39 in


OPTION .A
EXIT FROM THE END CAP



OPTION .B
EXIT FROM THE SIDE




OPTION .C
EXIT FROM BELOW




POSITION GUIDELINES

OPTION .A



OPTION .B



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.