



REF.
DATE

For each item select the request option



1

STOCKY FLAT

FOLIO®

Product type	Quantity	1 Screen type	2 CCT	3 Lens	4 Dimmability	5 Aluminum finish
STOCKY FLAT						

[mm] [in]

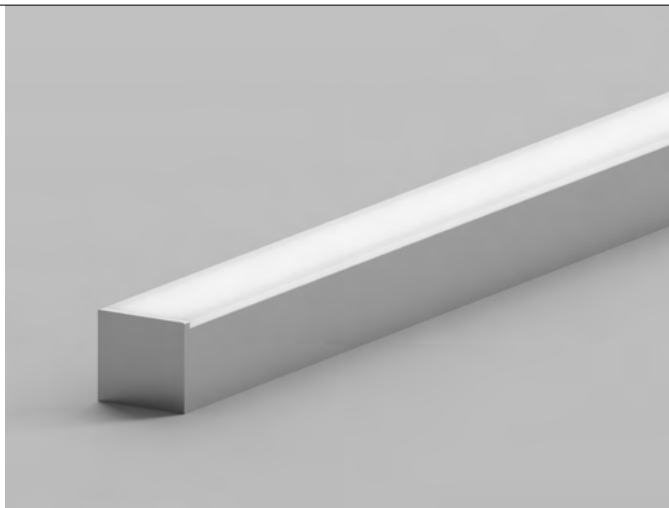

LIGHT SOURCE

LED type:	Nichia
LED Voltage:	24 Vdc
LED Duration:	50 000 h.
Power:	20 W/m
Screen type:	☐ T Transparent ☐ S Opal Double-Satin
Delivered Lumen:	☒ T 1725 lm/m ☒ S 1500 lm/m
Efficacy:	☒ T 86.25 lm/W ☒ S 75 lm/W
Candela:	☒ T 587 cd ☒ S 510 cd
CRI:	> 90 (> 100 on request - Nichia Optisolis™)
R9:	> 50 (> 80 on request - Nichia Optisolis™)
TM30:	Rf: 91 Rg: 100
SDCM:	3
Color Temperature (CCT):	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K ☐ 5700K ☐ on request: 2000K, 2200K, 2500K, 6500K

The Linear LED range redefines how light interacts with surfaces. Designed to meet the most demanding bespoke projects, these linear systems offer endless possibilities in terms of length, output, and placement. By sharing a common technical DNA with our point-source elements, they guarantee absolute visual harmony and a streamlined installation process, making them the ideal choice for comprehensive lighting layouts. Every detail is engineered to transform functional lighting into a distinctive architectural element.



GENERAL SPECS.

Dimensions:	21 x 19,2 mm / 0.82 x 0.75 in
Length:	max 3000 mm / 118 in (custom)
IP:	40

OPTICS

Optic Type:	lens
Beam Angle (BA°)	120°
	☒ 3

ELECTRICAL

Driver:	AC/DC 24 V
Dimmability:	☐ 0-10 V ☐ 1-10 V ☐ DALI ☐ DMX ☐ Bluetooth ☐ PUSH ☐ Casambi
	☒ 4

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

2

STOCKY FLAT

FOLIO®

Product type	Quantity	1 Screen type	2 CCT	3 Lens	4 Dimmability	5 Aluminum finish
STOCKY FLAT						

ALUMINIUM FINISHES

5


RAL/NCS/Pantone:

Polished finish:



LENS INFO


Beam Angle (BA°): 120°




INSTALLATION

Mechanic fastening

1. Install the fixing profile by screws




2. Snap the STOCKY profile into the fixing profile




Magnetic fastening

1. Fix the metal plate to the material



2. Snap the magnet to the metal plate



POWER CABLE EXIT

Power cable: 1000 mm / 39 in


OPTION .A

EXIT FROM THE END CAP




OPTION .B

EXIT FROM THE SIDE




OPTION .C

EXIT FROM BELOW




POSITION GUIDELINES


OPTION .A




OPTION .B



OPTION .C



OPTION .D



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.