

REF.
DATE


For each item select the request option

1

SLIM.13 + THIN.15

FOLIO®

Product type	Quantity*	1 Power	2 Screen type	3 CCT	4 Lens	5 Dimmability	6 Aluminum finish
SLIM.13							
THIN.15							

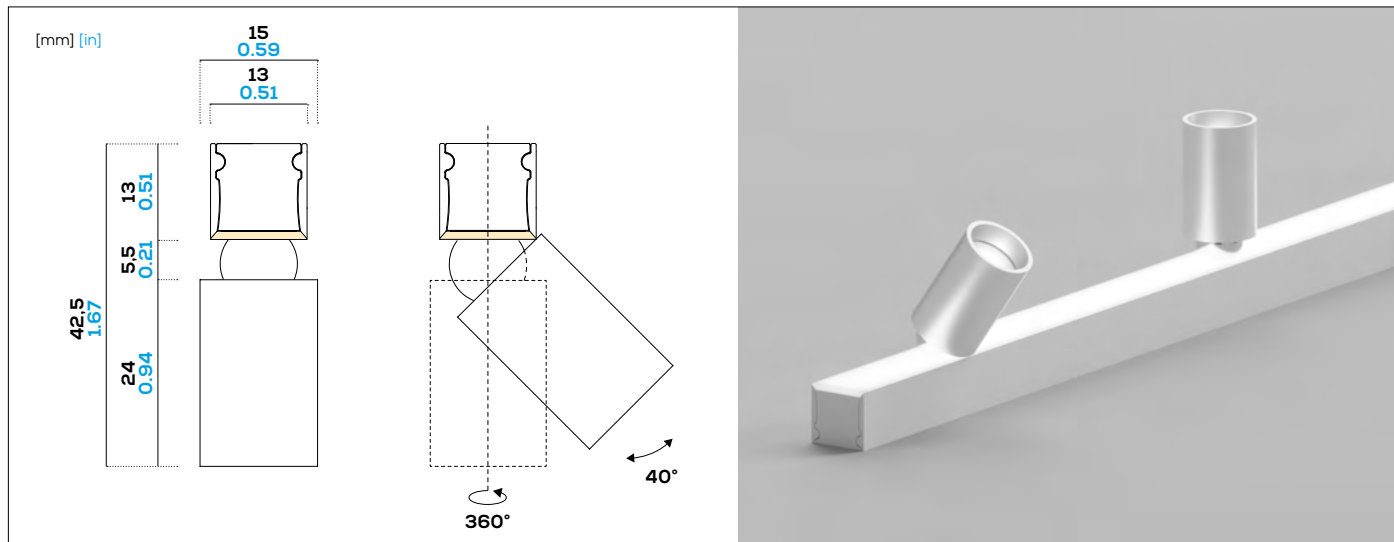

SLIM.13

LIGHT SOURCE

LED type:	186 LED/m (pitch 5,31mm)
LED Voltage:	24 Vdc
LED Duration:	50 000 h.
Power:	☐ 15.6 W/m ☐ 22.6 W/m
Screen type:	☐ Op20 ☐ Op35
Delivered Lumen:	15.6W/m 350mA - 1680 lm/m (Op20), 1408 lm/m (Op35) 22.6W/m 500mA - 2397 lm/m (Op20), 2037 lm/m (Op35)
Efficiency:	15.6W/m 107,69 lm/W (Op20), 90,26 lm/W(Op35) 22.6W/m 106,06 lm/W (Op20), 90,13 lm/W(Op35)
Candela:	15.6W/m 572 cd (Op20), 479 cd (Op35) 22.6W/m 815 cd (Op20), 393 cd (Op35)
CRI:	> 90
R9:	> 50 > 80
TM30:	Rf: 91 Rg: 100
SDCM:	2
Color Temperature (CCT):	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K ☐ 5000K on request: 2000K, 2200K, 2500K, 6500K

The Linear LED range redefines how light interacts with surfaces. Designed to meet the most demanding bespoke projects, these linear systems offer endless possibilities in terms of length, output, and placement. By sharing a common technical DNA with our point-source elements, they guarantee absolute visual harmony and a streamlined installation process, making them the ideal choice for comprehensive lighting layouts. Every detail is engineered to transform functional lighting into a distinctive architectural element.



GENERAL SPECS.

Dimensions:	13 x 13 mm / 0.51 x 0.51 in
Length:	max 2000 mm / 78.7 in (custom)
IP:	40

OPTICS

Optic Type:	lens
Beam Angle (BA°)	☐ 15° ☐ 25° ☐ 20°x40° ☐ 45°

ELECTRICAL

Driver:	AC/DC 24 V
Dimmability:	☐ 0-10 V ☐ DMX ☐ 1-10 V ☐ Bluetooth ☐ DALI ☐ Casambi ☐ PUSH

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE


For each item select the request option

2

SLIM.13 + THIN.15

FOLIO®

Product type	Quantity*	1 Power	2 Screen type	3 CCT	4 Lens	5 Dimmability	6 Aluminum finish
SLIM.13							
THIN.15							

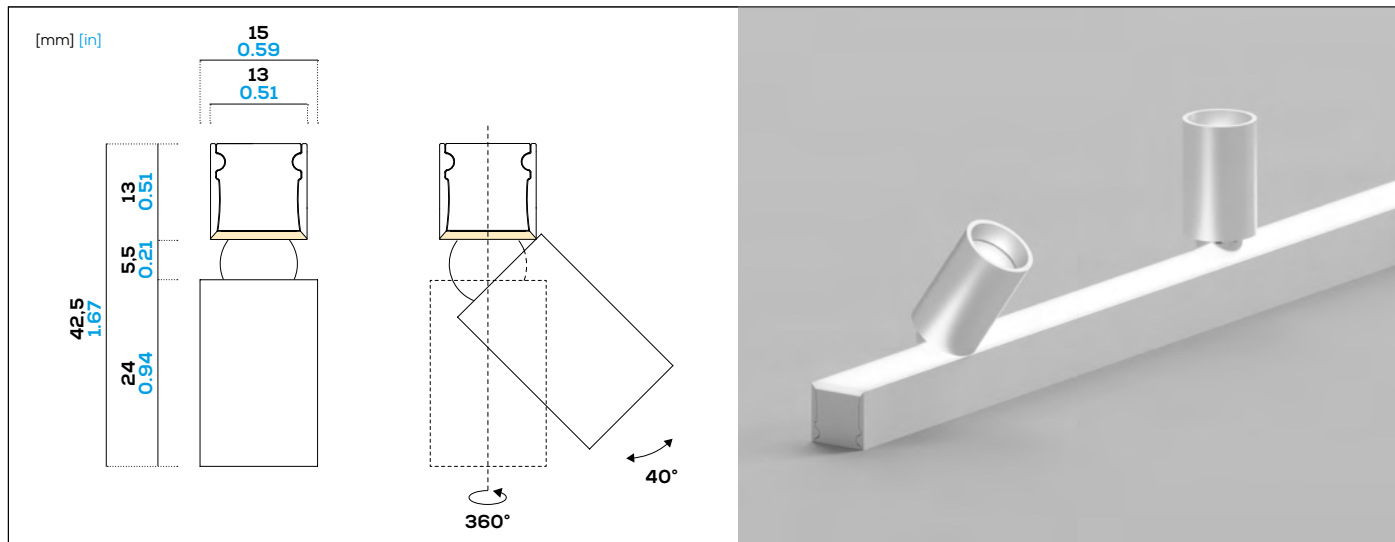

THIN.15

GENERAL SPECS.

Weight:	0.01 kg
Movement:	Adjustable: 360° rotation, 0-40° tilt
IP:	20

LIGHT SOURCE

LED type:	Nichia
LED Duration:	50 000 h.
Power:	1.5 W
Delivered Lumen:	145 lm
Efficacy:	96.6 lm/W
Candela:	49.3 cd
CRI:	> 90
R9:	> 80
TM30:	Rf: 91 Rg: 100
SDCM:	2
Color Temperature (CCT):	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K ☐ on request: 2000K, 2200K, 2500K, 5000K

The Spot.Mate system is a highly versatile range of spotlights, designed to meet the most diverse architectural and lighting needs. Available in four sizes, the spotlights can be installed on various surfaces, offering multiple features and movement possibilities. Each product is entirely customizable in various aspects to perfectly suit any specific project.



OPTICS

Optic Type:	lens
Beam Angle (BA°)	☐ 15° ☐ 25° ☐ 35° ☐ custom on request

ELECTRICAL

Driver:	DC/DC 24 V
Dimmability:	☐ 0-10 V ☐ 1-10 V ☐ DALI ☐ DMX ☐ Bluetooth ☐ PUSH ☐ Casambi

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

3

SLIM.13 + THIN.15

FOLIO®

Product type	Quantity*	1 Power	2 Screen type	3 CCT	4 Lens	5 Dimmability	6 Aluminum finish
SLIM.13							
THIN.15							

ALUMINIUM FINISHES

6

RAL/NCS/Pantone:

THIN.15

Brushed finish:

THIN.15

Galvanic finish:


THIN.15

Polished finish:

THIN.15


Color finish:

SLIM.13

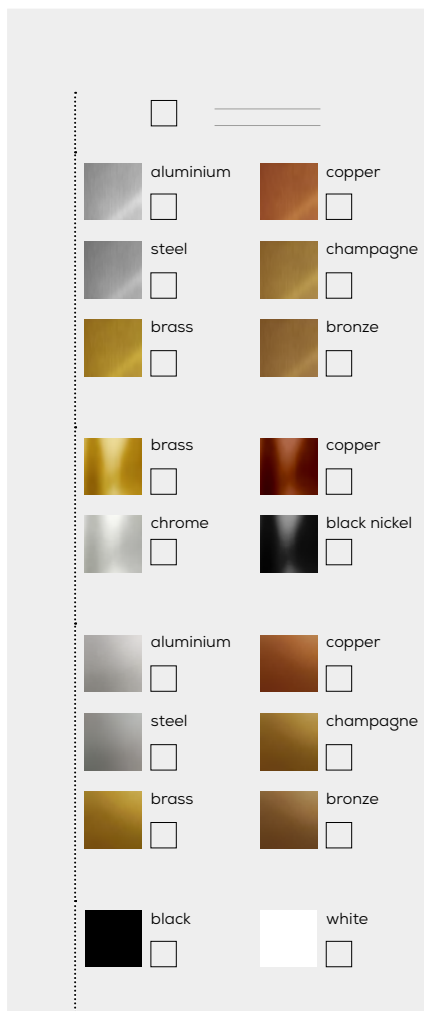


SLIM.13 LENS INFO

Beam Angle (BA°): 15°




THIN.15 LENS INFO


Beam Angle (BA°): 15°



Beam Angle (BA°): 25°




Beam Angle (BA°): 35°



INSTALLATION


Magnetic fastening

1. Fix the metal plate to the material
2. Attach the linear light




POSITION GUIDELINES

OPTION .A



OPTION .B



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

4

SLIM.13 + THIN.15



Product type	Quantity*	1 Power	2 Screen type	3 CCT	4 Lens	5 Dimmability	6 Aluminum finish
SLIM.13							
THIN.15							

*DRAW HERE YOUR OWN SETUP

100
3.94

1:20 SCALE

70
2.75

MINIMUM DISTANCE BETWEEN SPOTS

[mm]

[in]

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.