

TINY

FOLIO

Product type	Quantity	1 LED type	2 Power	3 Screen type	4 CCT	5 Dimmability	6 Aluminum finish
TINY							

[mm] [in]



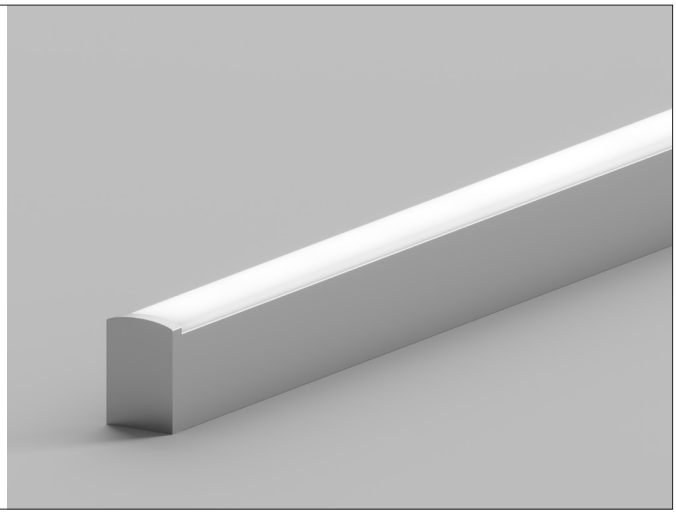

LIGHT SOURCE

LED Type: 1	☐	Nichia
	☐	Nichia Optisolis™
LED Duration:		50000 hours
Power: 2	☐	12 W/m / 3.66 W/ft std
	☐	18 W/m / 5.49 W/ft high
Screen Type: 3	☐	Transparent T
	☐	Satin S
	☐	Opal O
Delivered Lumen:	std T	1680 lm/m / 512.06 lm/ft
	std S	1500 lm/m / 457.20 lm/ft
	std O	1080 lm/m / 329.18 lm/ft
	high T	2500 lm/m / 762.00 lm/ft
(180 LED/m)	high S	2200 lm/m / 670.56 lm/ft
	high O	1600 lm/m / 487.68 lm/ft
Efficiency:	T	145 lm/W
	S	125 lm/W
	O	90 lm/W
CRI:		› 90 (› 100 - Nichia Optisolis™)
R9:		› 50 (› 80 - Nichia Optisolis™)
TM30:		Rf: 91 Rg: 100
SDCM:		3
Color Temperature (CCT): 4	☐	2700K
	☐	3000K
	☐	3500K
	☐	4000K
	☐	5700K
	☐	Tunable White (2700K-5700K)
	☐	on request: 2000K, 2200K, 2500K, 6500K

The Linear LED range redefines how light interacts with surfaces.
Designed to meet the most demanding bespoke projects, these linear systems offer endless possibilities in terms of length, output, and placement. By sharing a common technical DNA with our point-source elements, they guarantee absolute visual harmony and a streamlined installation process, making them the ideal choice for comprehensive lighting layouts. Every detail is engineered to transform functional lighting into a distinctive architectural element.

GENERAL SPECS.

Dimensions:	9,4 x 13,1 mm / 0.37 x 0.51 in
Lenght:	max 3000 mm / 118.11 in

OPTICS

Optic Type:	lens
Beam Angle (BA°)	120°

ELECTRICAL

Voltage:		24 Vdc		
Class:		3		
Driver:		AC/DC 24V		
Dimmability: 5	☐	0-10 V	☐	PHASE
	☐	1-10 V	☐	PUSH
	☐	DALI	☐	Bluetooth
	☐	DMX	☐	Casambi
IP:		40		

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.

TINY

FOLIO

Product type	Quantity	1 LED type	2 Power	3 Screen type	4 CCT	5 Dimmability	6 Aluminum finish
TINY							


ALUMINUM FINISHES

6

Standard:


Special
RAL/NCS/Pantone:

Special
Metallic effect:

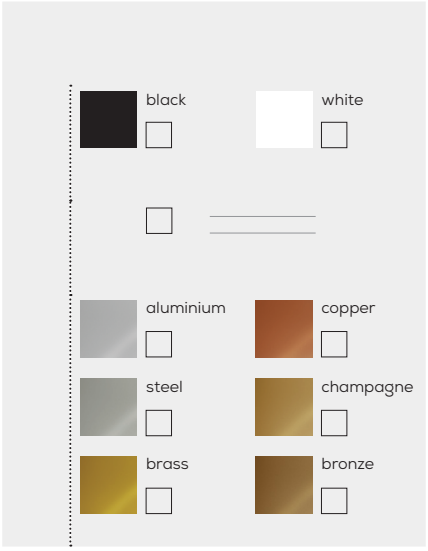

LENS INFO

Beam Angle (BA°): 120°




INSTALLATION

Mechanical

1. Install the fixing profile with screws

2. Snap the linear profile into place




SCREW HEAD
max Ø 4.1 mm
max Ø 0.16 in

Magnetic

1. Secure the metal plate to the mounting surface


2. Magnetically attach the linear profile




POWER CABLE EXIT

Power cable: 1000 mm / 39 in


OPTION .A
EXIT FROM THE END CAP



OPTION .B
EXIT FROM THE SIDE




OPTION .C
EXIT FROM BELOW




POSITION GUIDELINES


OPTION .A



OPTION .B



OPTION .C



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.