



REF.




Per ogni voce selezionare l'opzione scelta
For each item select the chosen option

1

.STICK

FOLIO®

Q.ty	Product type	Sizes	LED position	CCT	Al finish	Op finish	Fixing	Type Spot.Mate	Al finish Spot.Mate	CCT Spot.Mate	Lens Spot.Mate	Cable length	Warranty	Dimm.	LED type	IP Rating	Indirect light
		200 1400															

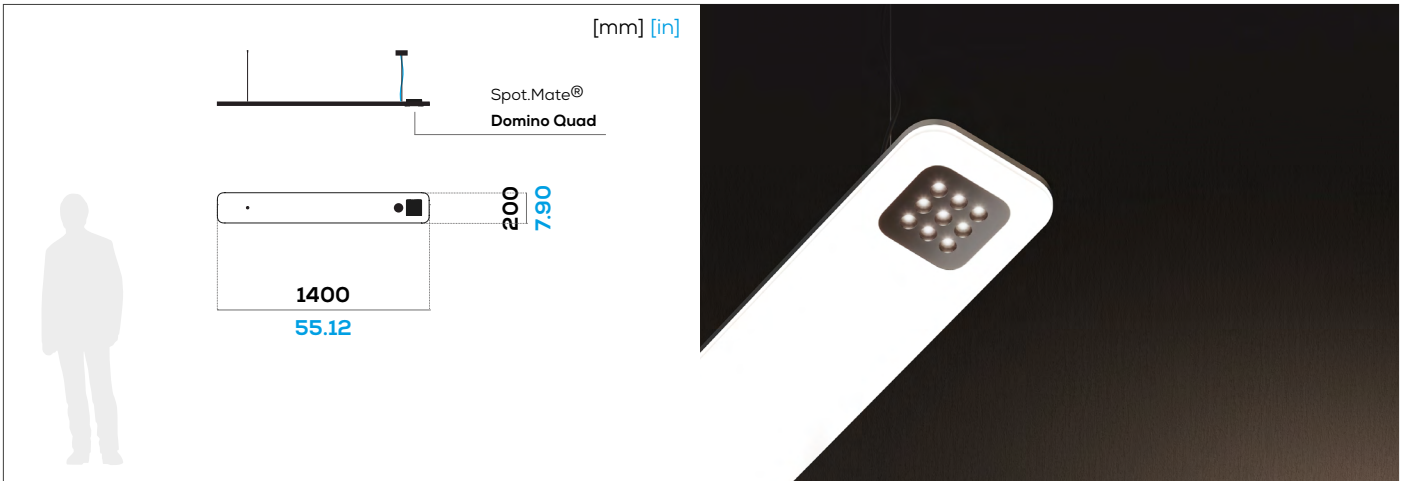


W 200 x 1400 mm W 7.90 x 55.12 in

Altre dimensioni disponibili.
Custom size available.

INSTALLATION

Il numero e la posizione dei cavi di sospensione e delle cover nel disegno sono indicativi.

The number and the position of the suspension cables and coverplates in the drawing are indicative.

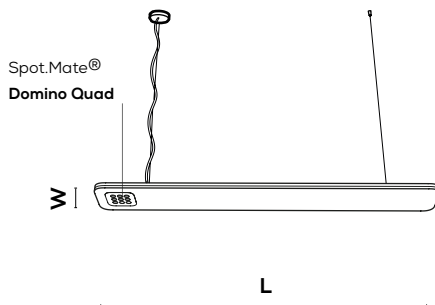

APPLICATIONS



TECHNICAL DESCRIPTION

STICK è la nuova serie di prodotti Folio a geometria lineare con lunghezze definite tra **1400 mm e 2500 mm** con larghezza tra **200 mm e 285 mm**. Omogeneità luminosa garantita dal diffusore opale con spessore 10 mm e dalla lastra interna in metacrilato incisa a laser con tecnologia edge lighting. Stick è dotato di 1/2 Folio Spot.Mate® **Domino Quad** a posizione fissa. Protezione esterna con scocca in alluminio per favorire la rigidità e la dissipazione del calore. LED Nichia ad alta efficienza energetica, dimmerabili 0-10 V, 1-10 V DALI, DMX, Bluetooth, Push. Disponibile nelle versioni con alimentatore remoto o con alimentatore integrato.

STICK is the new series of Folio products of linear form with defined lengths between **1400 mm and 2500 mm** and widths between 200 mm and 285 mm. Homogeneous luminosity is guaranteed by the opal diffuser with a thickness of 10 mm. The internal methacrylate plate is laser engraved with lighting edge technology.

Stick is equipped with 1/2 Folio Spot.Mate® **Domino Quad** fixed. The external protection made of an aluminum shell favours rigidity and heat dissipation. The Nichia LEDs with high energy efficiency, are dimmable 0-10 V, 1-10 V, DALI, DMX, Bluetooth, Push. Available either with remote or integrated power supply.


STANDARD CERTIFICATIONS



LIGHTING ACCESSORIES



POLAR DIAGRAM

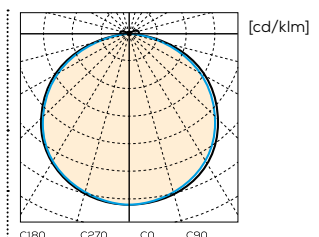



REF.

Per ogni voce selezionare l'opzione scelta
For each item select the chosen option

2

.STICK

FOLIO®

Q.ty	Product type	Sizes	LED position	CCT	Al finish	Op finish	Fixing	Type Spot.Mate	Al finish Spot.Mate	CCT Spot.Mate	Lens Spot.Mate	Cable length	Warranty	Dimm.	LED type	IP Rating	Indirect light
		200 1400															

OPTION .A
versione **alimentazione remota**
remote power supply version

Spot.Mate®
Domino Quad

1400
55.12

200
7.90

OPTION .B
versione **alimentazione integrata**
integrated power supply version

Spot.Mate®
Domino Quad

1400
55.12

200
7.90

Possibile posizionamento del box/alimentatore
Possible positioning of box/driver

QUANTITÀ
QUANTITIES

W 200 x 1400 mm W 7.90 x 55.12 in



PHYSICAL SPECS.

Tipologia di prodotto:
Product type:

- ST.A** Versione con **alimentazione remota**
(alimentatore non incluso)
Remote power supply version
(power supply not included)
- ST.B** Versione con **alimentazione integrata**
(alimentatore non incluso)
Integrated power supply version
(power supply not included)

Spessore:
Thickness:23 mm
0.90 in

(*) Spot.Mate® Domino Quad

38 mm (*)
1.49 inPeso:
Weight:10,6 kg
23.37 lbMateriali:
Materials:Alluminio - Metacrilato - LED
Aluminum - Methacrylate - LEDDimensioni:
Sizes: **W** 200 mm
7.90 in **L** 1400 mm
55.12 in

(*) Spot.Mate® Domino Quad

 W 100 mm (*)
3.93 in **L** 100 mm (*)
3.93 inCavi di sospensione:
Suspension cables:

2

Lunghezza cavi sosp.
Cable susp. length: **3** Standard: 3000 mm
Standard: 118.11 in **5** 5000 mm (su richiesta)
196.86 in (on request)Cover cavo alimentazione:
Power cable coverplate:Tonda
Round

GENERAL SPECS.

Installazione:
Fixing: **S** Standard a sospensione
Suspended standardAmbiente di utilizzo:
Environment of use:Interno
IndoorDurata LED:
LED lifespan:L90 > 60.000 ore a 50° Celsius
L90 > 60.000 hours at 50° CelsiusBlue light risk group:
Blue light risk group:EXEMPT UNLIMITED (200 mm)
EXEMPT UNLIMITED (7.87 in)Garanzia:
Warranty: **2Y** 2 anni
2 years **5Y** Su richiesta estensione fino a 5 anni
On request extension up to 5 years

FINISHES

Finiture alluminio:
Aluminum finishes: **W** bianco
white **B** nero
black **S** speciale (verniciatura o ossidazione)
special (liquid painting or oxidation)Finiture
Spot.Mate® Domino Quad:
Spot.Mate® Domino quad
finishes: **B** nero
black **S** speciale (verniciatura o ossidazione)
special (liquid painting or oxidation)



REF.

Per ogni voce selezionare l'opzione scelta
For each item select the chosen option

3

.STICK

FOLIO®

Q.ty	Product type	Sizes	LED position	CCT	Al finish	Op finish	Fixing	Type Spot.Mate	Al finish Spot.Mate	CCT Spot.Mate	Lens Spot.Mate	Cable length	Warranty	Dimm.	LED type	IP Rating	Indirect light
		200 1400															

Finiture diffusore:

Diffuser finishes:

(*) Finiture speciali su richiesta

(*) Special finishes on request

- M** opale opaco
matte opal
- G** opale lucido
glossy opal
- OM** Opale Milling - fresato (*)
Opal Milling - milled
- OS** Opale Sculpture - inciso a laser (*)
Opal Sculpture - laser engrave
- OP** opale stampato (*)
printed opal
- OF** opale con pellicola stampata (*)
opal with printed film

Posizione LED:

LED position:

- P1** Perimetro
Perimeter
- P1** 80 W
- 13 W @ 500 mA (*)
- 18,8 W @ 700 mA (*)
- P1** 2600 lm
- 1456 lm (*)
- 1899 lm (*)

Consumo:

Consumption:

(*) Spot.Mate®

Domino Quad (HE)

(*) Spot.Mate®

Domino Quad (HO)

Flusso luminoso output:

Luminous flux output:

(*) Spot.Mate®

Domino Quad (HE)

(*) Spot.Mate®

Domino Quad (HO)

ELECTRICAL SPECS.

Voltaggio:

Voltage:

Driver - alimentatore:

Driver - power supply:

Dimmerabilità:

Dimmability:

- 24V DC
- AC/DC 24V
- 010** 0-10V
- 110** 1-10V
- DA** DALI
- DM** DMX
- BL** Bluetooth
- PH** PUSH

Lenti

Spot.Mate® **Domino Quad:**

Lens

Spot.Mate® **Domino Quad:**

- 20°**
- 36°**

Indice di resa cromatica:

Color rendering index:

- N** Standard
CRI: Ra min. 90 - R9 min. 50
- O** Su richiesta CRI: Ra = 100
(*Nichia Optisolis™*)
On request CRI: Ra = 100
(*Nichia Optisolis™*)

LED

Tipologia LED:

LED type:

- N** **NICHIA 757 R9050**
- O** *Nichia Optisolis™ (su richiesta)*
Nichia Optisolis™ (on request)
- V** *Nichia Vitasolis™ (su richiesta)*
Nichia Vitasolis™ (on request)

Grado di protezione:

IP rating:

- 40** Standard:
IP40
- 54** *IP54 (su richiesta)*
IP54 (on request)
- DL** *Damp Location (su richiesta)*
Damp Location (on request)

UGR

Tipologia LED

Spot.Mate® **Domino Quad:**Spot.Mate® **Domino Quad**

LED type:

NICHIA

Indici di riflessione:

Reflectance indexes:

UGR

STICK:

UGR

Spot.Mate® **Domino Quad:**

X = 4H, Y = 8H, S = 0,25H

70/ 50/ 20

<19

<19



REF.



Per ogni voce selezionare l'opzione scelta
For each item select the chosen option

.STICK



Q.ty	Product type	Sizes	LED position	CCT	Al finish	Op finish	Fixing	Type Spot.Mate	Al finish Spot.Mate	CCT Spot.Mate	Lens Spot.Mate	Cable length	Warranty	Dimm.	LED type	IP Rating	Indirect light
		200 1400															

Temp. colore (CCT):

Color temp. (CCT):

(*) Lo spessore del pannello varia con CCT dinamici

(*) Panel thickness changes with dynamic CCT

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- 57 5700K
- TW Tunable White (2700K - 5700K) (*)
- R RGB (*)
- RW RGBW (*)
- RTW RGBTW (*)
- RQ *Su richiesta 2000K, 2200K, 2500K, 5000K, 6500K and TW custom (*)
On request 2000K, 2200K, 2500K, 5000K, 6500K and custom TW*

Temp. colore (CCT)

Spot.Mate® Domino Quad

Spot.Mate® Domino Quad color temp (CCT):

- 30 3000K
- 35 3500K
- 40 4000K
- RQ *Su richiesta 2700K, 5000K
On request 2700K, 5000K*

LIGHTING ACCESSORIES

Folio Indirect Light (*):



(*) Lo spessore del pannello potrebbe variare con l'aggiunta di accessori

(*) Panel thickness may change with the addition of accessories

- FB FOLIO BASE**
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- 57 5700K

KEY TO SYMBOLS

Folio Indirect Light:



Folio Spot.Mate®:



- TW Tunable White (2700K - 5700K)
- R RGB
- RW RGBW
- RTW RGBTW
- RQ *Su richiesta 2000K, 2200K, 2500K, 6500K and TW custom
On request 2000K, 2200K, 2500K, 6500K and custom TW*

FL FOLIO LINEAR

- TY TINY
- TY45 TINY 45
- STK STOCKY

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- 57 5700K
- RQ *Su richiesta 2000K, 2200K, 2500K, 6500K, TW custom and RGB
On request 2000K, 2200K, 2500K, 6500K, custom TW and RGB*

